
0606 NEON FLEX

Small Neon Flex



0606 silicone neon



6 × 6 mm cross-section

PRODUCT SPECIFICATIONS


Colour temperatures	3000K warm white / 4000K natural white
Light output / CRI	Approx. 550 lm/m / CRI ≥90
Cut interval	25 mm at the marked cutting points
Bending	Vertical / top bend • minimum diameter 50 mm
Supplied length	5 m • 2m • 1m
Mounting	Surface or recessed mounting with suitable support

CORE RATINGS

Section	Rated power	Supply	Protection
6 × 6 mm	8 W/m	24 V DC	IP67

50 mm minimum bend diameter equals 25 mm radius. Do not twist the neon.

BENDING AND CONNECTION

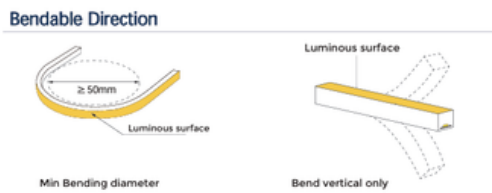

Vertical bending only • minimum diameter 50 mm

INSTALLATION
Test before fitting. Cut squarely at marked points and reseal using the specified endcap and sealant system. Confirm driver sizing, cable capacity and feed arrangement.

Product information: tgtech.co.nz/products/small-flex-0606