
info@tgtech.co.nz
www.tgtech.co.nz
+64 21 202 2723

Product Name
Rect

SKU / Code
AP-A1707-3W / AP-A1707-3A / AP-A1707-3B



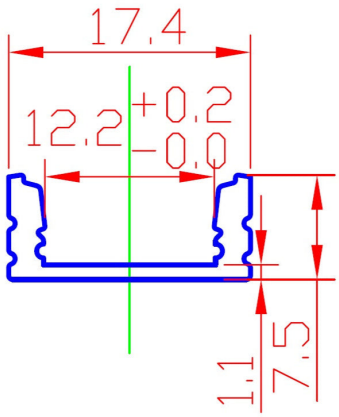

PRODUCT DETAILS

Material - Anodised aluminium
Dimensions - 17.4 mm W x 7.5 mm H
Length - 3 metres
Internal width - 12.2 mm
Cover - Frosted, clear or black
Finish - White, silver or black
Mounting - Surface profile
Wire entry - Bottom or end
Endcaps and clips - PVC
Waterproof rating - IP20

COMPATIBLE LED RIBBON OPTIONS

High Task LED - 16.4 W/m, 24 V, 8 mm PCB
3000 K / 4000 K / 6000 K

Low COB - 10 W/m, 24 V, 8 mm PCB
3000 K / 4000 K / 6000 K

Mid Task LED - 14.4 W/m, 24 V, 10 mm PCB
3000 K / 4000 K / 6000 K

Ambient - 4.8 W/m, 24 V, 8 mm PCB
3000 K / 4000 K / 6000 K

Confirm PCB width, diffuser clearance, connectors and total load before installation.

info@tgtech.co.nz
www.tgtech.co.nz
+64 21 202 2723

DRIVER TRANSFORMERS

24 V constant-voltage power supplies

30 W supply - use up to 24 W calculated load
60 W supply - use up to 48 W calculated load
Larger supply - confirm final selection with TGTECH

ALLOW 20% SPARE CAPACITY

Recommended capacity = load x 1.25

Keep the power supply accessible.

REMOTES AND CONTROLLERS

R11 remote - single-colour control, 1 zone
RS1 remote - single-colour control, 4 zones
T21 wall panel - single-colour control, 4 zones
Wi-Fi controller - app control where compatible

SENSORS

Recessed or surface-mount single-door sensor
Recessed or surface-mount double-door sensor
Concealed magnetic door sensor
Hand-motion, PIR motion or wireless PIR sensor

INSTALLATION NOTES

Use indoors unless the complete installation is specifically rated for wet areas.
Test all lighting and controls before installation. Do not twist, kink or sharply bend ribbon.
Keep power supplies, sensors and receiver units accessible and adequately ventilated.
TGTECH product warranty covers products supplied, not installation labour.

Technical support

Call +64 21 202 2723 or email info@tgtech.co.nz for product selection support.